



Industrial Supply Company



Leading Through Innovation



HSS & HSS-E


PIPE TAPS

GASGEWINDEBOHRER

- Tapping Whitworth Pipe threads
- Zum Gewindeschneiden von Whitworth-Rohrgewinden

HSS & HSS-E PIPE TAPS

Tapping Whitworth Pipe threads

HOLE TYPE							
TOOL MATERIAL			HSS		HSS-E		
CHAMFER LEAD ACC. TO DIN2197			I/III		C		
FLUTE TYPE			Straight Flute		Spiral Flute		
SPIRAL FLUTE ANGLE			-		-		
SERIES	M	DIN371/376					
		DIN352					
		DIN357/LONG					
	MF	DIN374					
		DIN2181					
	UNC	DIN371/376					
		DIN351					
	UNF	DIN371/374					
		DIN2181					
	BSW	DIN2182/2183					
		DIN351					
	G(BSP)	DIN5156/5157	T7709 (P.301)	TC728 (P.302)	TC729 (P.303)	TB514 (P.304)	TC727 (P.305)
	EG-M	DIN371/376					
	EG-UNC	DIN371/376					
	EG-UNF	DIN371/374					
SURFACE TREATMENT			Bright	Bright	Bright	VAP	Bright
MODEL							
HB	HRC						
125		○			◎		
190	13	○	◎		◎	◎	
250	25	○	◎			◎	
270	28		◎			◎	
300	32						
180	10	○	◎	○		◎	
275	29		◎	○		◎	
300	32			◎			
350	38			◎			
200	15						
325	35						
200	15				◎		
240	23				◎		
180	10			○	◎		
180	10	○					
260	26	○					
160	3		◎			◎	
250	25		◎			◎	
130							
230	21						
60		○	○			○	
100		○	○			○	
75		○	○			○	
90			○			○	
130			◎			◎	
110			◎			◎	
90			○			○	
100							
200	15						
280	30						
250	25						
350	38						
320	34						
400 Rm							
1050 Rm							
550	55						
630	60						
400	42						
550	55						

Please visit globalyg1.com/mat for material search

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc					
P	1	Non-alloy steel	About 0.15% C	Annealed	125		○				
	2		About 0.45% C	Annealed	190	13	○	◎		◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	○	◎		◎	◎
	4		About 0.75% C	Annealed	270	28		◎			◎
	5		About 0.75% C	Quenched & Tempered	300	32					
	6	Low alloy steel		Annealed	180	10	○	◎	○		◎
	7			Quenched & Tempered	275	29		◎	○		◎
	8			Quenched & Tempered	300	32			◎		
	9			Quenched & Tempered	350	38			◎		
	10	High alloyed steel, and tool steel		Annealed	200	15					
	11			Quenched & Tempered	325	35					
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15				◎	
	13		Martensitic	Quenched & Tempered	240	23				◎	
	14		Austenitic		180	10			○	◎	
K	15	Grey cast iron	Pearlitic / ferritic		180	10	○				
	16		Pearlitic (Martensitic)		260	26	○				
	17	Nodular cast iron	Ferritic		160	3		◎			◎
	18		Pearlitic		250	25		◎			◎
	19	Malleable cast iron	Ferritic		130						
	20		Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable		60		○	○			○
	22		Curable	Hardened	100		○	○			○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○			○
	24		≤ 12% Si, Curable	Hardened	90			○			○
	25		> 12% Si, Not Curable		130			◎			◎
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110			◎			◎
	27		CuZn, CuSnZn (Brass)		90			○			○
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper		100						
	29		Duroplastic, Fiber Reinforced Plastic								
	30		Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33			Annealed	250	25					
	34		Ni or Co Based	Cured	350	38					
	35	Titanium Alloys		Cast	320	34					
	36		Pure Titanium		400 Rm						
H	37	Hardened steel	Alpha + Beta Alloys	Hardened	1050 Rm						
	38										
	39			Hardened	550	55					
	40			Hardened	630	60					
	41	Hardened Cast Iron		Cast	400	42					



G(BSP)

Whitworth Pipe threads DIN ISO 228/1

- Whitworth Rohrgewinde DIN ISO 228/1
- G(BSP) PROFIL 55° DIN ISO 228/1
- Filettatura Whitworth per tubi DIN ISO 228/1

- Serial hand tap set in First and Bottoming.
- Bottoming tap of set has final internal thread dimensions only.

- Handgewindebohrersatz mit Vor- und Fertigschneider.
- Nur der Fertigschneider kann das gewünschte Gewinde schneiden.

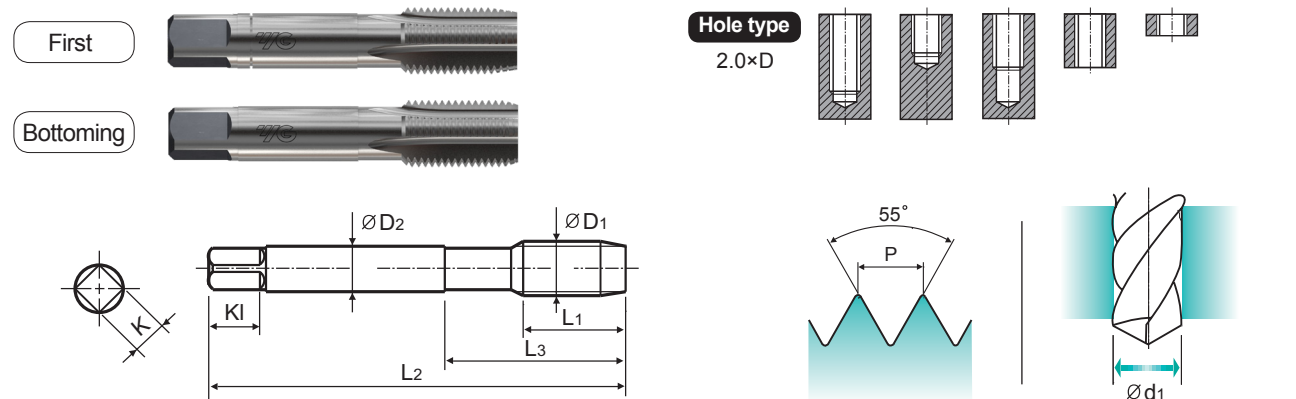Sets of taps
Gewindebohrer-Satz

Unit : mm										
SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
G1/16	- 28	T7709029	22	56	26	6	4.9	8	3	6.8
G1/8	- 28	T7709209	20	63	27	7	5.5	8	4	8.8
G1/4	- 19	T7709409	22	70	32	11	9	12	4	11.8
G3/8	- 19	T7709489	22	70	32	12	9	12	4	15.25
G1/2	- 14	T7709569	22	80	35	16	12	15	4	19
G3/4	- 14	T7709709	22	90	40	20	16	19	4	24.5
G1	- 11	T7709789	25	100	45	25	20	23	6	30.75
G1-1/4	- 11	T7709869	40	125	77	32	24	27	6	39.5
G1-1/2	- 11	T7709949	40	140	85	36	29	32	6	45.2

◎ : Excellent ○ : Good										
ISO	P									
Material Description	Non-alloy steel					Low alloy steel			High alloyed steel, and tool steel	
VDI 3323	1	2	3	4	5	6	7	8	9	10
HB	125	190	250	270	300	180	29	302	38	15
Recommended	○	○	○			○				
ISO	M									
Material Description	Stainless steel					Grey cast iron			Nodular cast iron	
VDI 3323	12	13	14	15	16	17	18	19	20	21
HB	23	23	23	23	23	160	250	130	230	
Recommended	○	○	○			○				
ISO	K									
Material Description	Malleable cast iron					Hardened steel			Chilled Cast Iron	
VDI 3323	22	23	24	25	26	27	28	29	30	31
HB	60	100	75	90	130	110	90	100		
Recommended	○	○	○							


G(BSP)

Whitworth pipe threads DIN ISO 228/1

- Whitworth Rohrgewinde DIN ISO 228/1
- G(BSP) PROFIL 55° DIN ISO 228/1
- Filettatura Whitworth per tubi DIN ISO 228/1

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

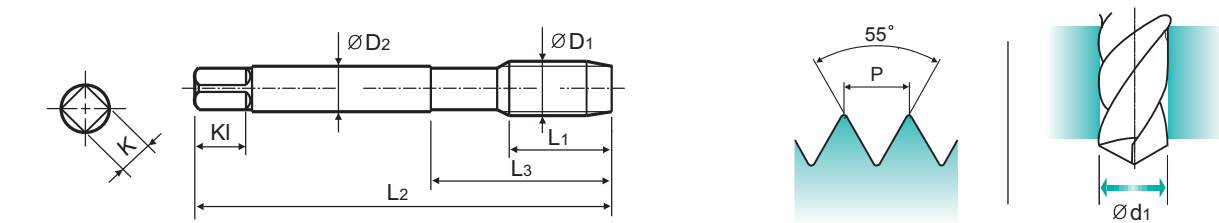

Recommended Cutting Page : P.306 Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
G1/8 - 28		TC728200	20	90	36	7	5.5	8	3	8.8
G1/4 - 19		TC728400	22	100	40	11	9	12	3	11.8
G3/8 - 19		TC728480	22	100	40	12	9	12	3	15.25
G1/2 - 14		TC728560	25	125	50	16	12	15	4	19
G3/4 - 14		TC728700	28	140	54	20	16	19	4	24.5
G1 - 11		TC728780	30	160	60	25	20	23	4	30.75

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


G(BSP)

Whitworth pipe threads DIN ISO 228/1

- Whitworth Rohrgewinde DIN ISO 228/1
- G(BSP) PROFIL 55° DIN ISO 228/1
- Filettatura Whitworth per tubi DIN ISO 228/1

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

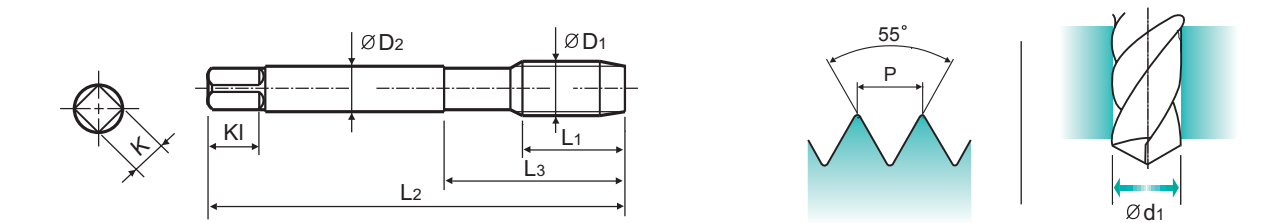

Recommended Cutting Page : P.306 Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
G1/8 - 28		TC729200	20	90	36	7	5.5	8	3	8.8
G1/4 - 19		TC729400	22	100	40	11	9	12	3	11.8
G3/8 - 19		TC729480	22	100	40	12	9	12	3	15.25
G1/2 - 14		TC729560	25	125	50	16	12	15	4	19
G3/4 - 14		TC729700	28	140	54	20	16	19	4	24.5
G1 - 11		TC729780	30	160	60	25	20	23	4	30.75

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S					H				
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


G(BSP)

Whitworth pipe threads DIN ISO 228/1

- Whitworth Rohrgewinde DIN ISO 228/1
- G(BSP) PROFIL 55° DIN ISO 228/1
- Filettatura Whitworth per tubi DIN ISO 228/1

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.

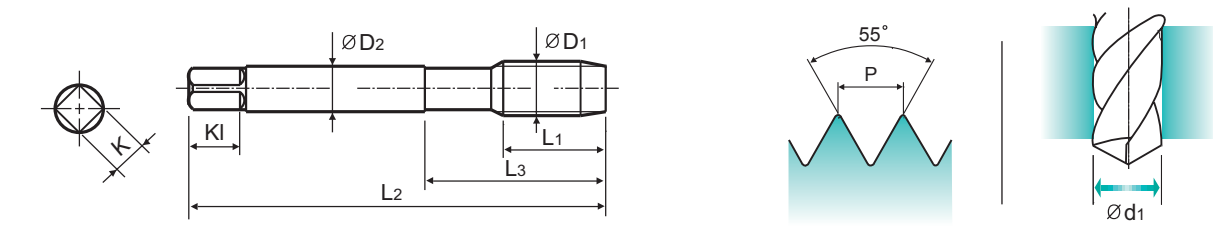

VA
NW

HSS-E

DIN 5156

55°

C

Vap

R40

Machine taps
Maschinengewindebohrer

Recommended Cutting Page : P.306

Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Vap	L1	L2	L3	ØD2	K	KI	Z	Ød1
G1/8 - 28		TB514200	20	90	36	7	5.5	8	3	8.8
G1/4 - 19		TB514400	22	100	40	11	9	12	3	11.8
G3/8 - 19		TB514480	22	100	40	12	9	12	3	15.25
G1/2 - 14		TB514560	25	125	50	16	12	15	4	19
G3/4 - 14		TB514700	28	140	54	20	16	19	4	24.5
G1 - 11		TB514780	30	160	60	25	20	23	4	30.75


G(BSP)

Whitworth Pipe threads DIN ISO 228/1

- Whitworth Rohrgewinde DIN ISO 228/1
- G(BSP) PROFIL 55° DIN ISO 228/1
- Filettatura Whitworth per tubi DIN ISO 228/1

► Suitable for through hole in more cutting speed than other taps due to strong geometry.

► Geeignet für Sacklöcher in höherer Schnittgeschwindigkeit als andere Gewindebohrer dank einer stabilen Bohrergeometrie.

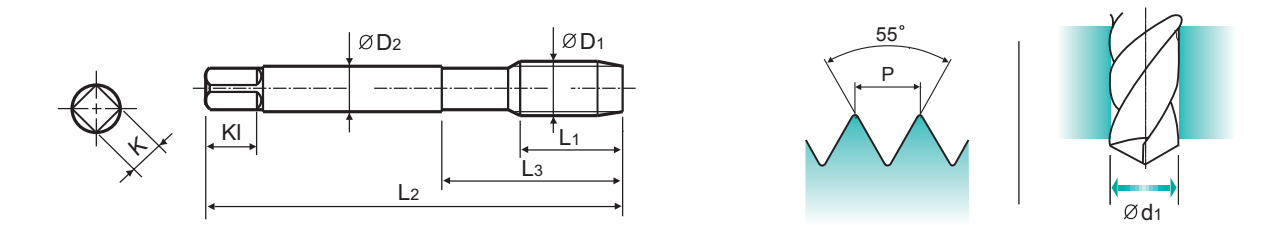

GS

HSS-E

DIN 5156

55°

B

Bright

Machine taps
Maschinengewindebohrer

Recommended Cutting Page : P.306

Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
G1/8 - 28		TC727200	20	90	36	7	5.5	8	3	8.8
G1/4 - 19		TC727400	22	100	40	11	9	12	3	11.8
G3/8 - 19		TC727480	22	100	40	12	9	12	3	15.25
G1/2 - 14		TC727560	25	125	50	16	12	15	4	19
G3/4 - 14		TC727700	28	140	54	20	16	19	4	24.5
G1 - 11		TC727780	30	160	60	25	20	23	4	30.75

◎ : Excellent ○ : Good

ISO	P										M				K			
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel				Stainless steel			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎								◎	◎	◎					◎	◎
ISO	N										S				H			
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRc																		
HB	60	100	75	90	130	110	90	100										
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

◎ : Excellent ○ : Good

ISO	P										M				K			
Material Description	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel				Stainless steel			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S				H			
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRc																		
HB	60	100	75	90	130	110	90	100										
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

					TC728	TC729	TB514	TC727
ISO	VDI 3323	Material Description	HB	HRc	Vc (m/min)			
P	1	Non-alloy steel	125				15-20	
	2		190	13	15-20		15-20	15-20
	3		250	25	12-18			12-18
	4		270	28	10-15			10-15
	5		300	32				
	6	Low alloy steel	180	10	10-15	10-15		10-15
	7		275	29	10-15	10-15		10-15
	8		300	32		6-10		
	9		350	38		3-5		
	10	High alloyed steel, and tool steel	200	15				
	11		325	35				
M	12	Stainless steel	200	15			7-10	
	13		240	23			5-8	
	14		180	10		4-6	4-6	
K	15	Grey cast iron	180	10				
	16		260	26				
	17	Nodular cast iron	160	3	10-15			10-15
	18		250	25	5-8			5-8
	19	Malleable cast iron	130					
	20		230	21				
N	21	Aluminum-wrought alloy	60		10-15			10-15
	22		100		10-15			10-15
	23	Aluminum-cast, alloyed	75		15-20			15-20
	24		90		15-20			15-20
	25		130		10-15			10-15
	26	Copper and Copper Alloys (Bronze / Brass)	110		25-35			25-35
	27		90		8-12			8-12
	28		100					
	29	Non Metallic Materials						
	30							
S	31	Heat Resistant Super Alloys	200	15				
	32		280	30				
	33		250	25				
	34		350	38				
	35		320	34				
	36	Titanium Alloys	400 Rm					
	37		1050 Rm					
H	38	Hardened steel	550	55				
	39		630	60				
	40	Chilled Cast Iron	400	42				
	41	Hardened Cast Iron	550	55				