

# Fluid Handling



## Liquid Measures

Chemical and oil resistant polyethylene.

### Graduations:

¼ltr - 10ml,  
½ltr - 10ml,  
1ltr - 10ml,  
2ltr - 20ml,  
3ltr - 50ml,  
5ltr - 100ml.



Capacity	Weight each	Order Code KEN-540
¼ltr	45g	-5500K
½ltr	75g	-5520K
1ltr	100g	-5540K
2ltr	180g	-5560K
3ltr	260g	-5580K
5ltr	360g	-5600K

## Heavy Duty Liquid Measures

Chemical and oil-resistant polyethylene. Integral dispensing spout. Can be used in conjunction with dispensing spouts ed below.

### Graduations:

½ltr - ¼ and ½ltr,  
1ltr - ¼, ½, ¾ltr,  
2ltr - ½, 1, 1½ and 2ltr,  
3ltr - 1, 1½, 2, 2½ and 3ltr,  
5ltr - 1, 2, 3, 4 and 5ltr.



Capacity	Weight each	Order Code KEN-540
½ltr	60g	-5700K
1ltr	100g	-5720K
2ltr	180g	-5740K
3ltr	240g	-5760K
5ltr	340g	-5770K

## Pouring Spouts

Flexible polyethylene, suitable for use with the spouted funnels and measures.

Suitable For	Weight each	Order Code KEN-540
½ & 1ltr Measures	5g	-5160K
2, 3, & 5ltr Measures	15g	-5170K

## Tin-Plated Oil Supply Cans

With easy pour handles, extended spout with chain retained end cap and hinged lid cap.



Capacity litre	Weight each	Order Code KEN-540
3	562g	-2540K
5	702g	-2560K
10	1038g	-2580K



## 20ltr Plastic Jerry Can

### 21-127

HDPE (high density polyethylene) jerry can complete with patented jerrycan locking cap and internally stored spout. Robust and impact resistant.

UN Approved.  
Class 3.



Capacity	Order Code PRL-540
20ltr	-5610A

## Plastic Funnels

Resistant to oil and chemicals. Heavy duty polyethylene which will not shatter or break in cold weather.



Diameter (mm)	Order Code KEN-540
55	-2812K
75	-2817K
100	-2822K
120	-2832K
150	-2842K

## Plastic Funnel Set

### Contents:

50, 75, 100 and 125mm.

4  
PIECES



Number of Pieces	Order Code KEN-540
4	-2892K

## Heavy Duty Plastic Funnels

With anti-splash rims



Diameter (mm)	Order Code KEN-540
160	-2912K
195	-2922K
235	-2932K
350	-2940K

## Polyethylene Funnel with Lockable Lid

Screws into a standard 2" bung hole on a barrel. Includes a removable filter screen.

Size: 253mm x 201mm



Capacity	Order Code KEN-540
4.5ltr	-2680K

## Plastic Jerry Cans

Secure water containers manufactured from food grade plastic available in 10, 15 and 20ltr capacities, fitted with a collared screw top for ease of refilling and a twist on-off tap for spill free dispensing.

The moulded handle design makes it ideal for transporting and storing water in and around the work place, home or when travelling.



Capacity litre	Type	Order Code KEN-540
10	Water	-6500K
15	Water	-6520K
20	Water	-6540K
35	Water	-6570K

## Industrial Quality Plastic Funnel

### Rectangular

Suitable for use with petrol, oil, water etc.



Size (mm)	Weight each	Order Code KEN-540
250 x 180	210g	-2900K

## Tin-Plated Indus Quality Funnels

Suitable for use with petrol, oil, water etc.



Diameter (mm)	Weight each	Order Code KEN-540
150	140g	-2600K
200	250g	-2800K

## Metal Funnel with Plastic Spout & Filter

Sturdy metal construction complete with integral handle for ease of use, plastic spout and removable filter. High rim design guards against splashing. Flexible spout extension also available (KEN-540-2700K).



Diameter	Order Code KEN-540
170mm	-2690K
Flexible spout extension	-2700K

## Plasti

With an removal filter, int and rigi



Diameter (mm)	Order Code KEN-540
160	-2962K

## Plastic Funnel

With anti-splash rim, integral hanging hook and 300mm detachable flexible spout.



Diameter (mm)	Order Code KEN-540
160	-2997K

## Fluid Handling


### KENNEDY Rotary Pump

#### RP250

Cast iron pump, steel suction tube and spout. Suitable for lubricants and diesel (not anti-freeze). Suitable for container size 200ltr. Tube length 980mm. Inlet on pump 2" BSP and M59 x 5 male thread.



Discharge per Stroke	Weight each	Order Code
250ml 35ltr/min	5.7kg	<b>KEN-540</b> <b>-3100K</b>

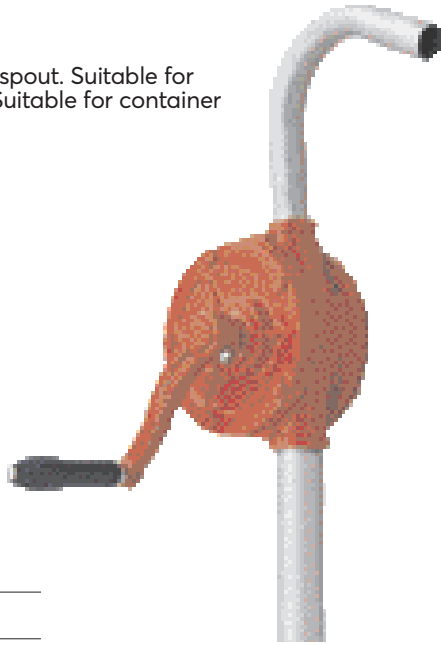

### Lever Pump

#### LP300

Zinc chrome finish steel, telescopic suction tube. Suitable for lubricants, diesel and non-corrosive liquids. Suitable for container sizes 60 and 200ltr. Tube length 480 - 900mm. Inlet on pump 2" BSP and M59 x 5 male thread.



Discharge per Stroke	Weight each	Order Code
300ml	2.0kg	<b>KEN-540</b> <b>-3000K</b>



### YAMOTO

### Steel Lever Action Barrel Pump

Self adjusting telescopic suction tube. Comfortable handle grip. Suitable for lubricants & non-corrosive liquids.



Discharge per Stroke	Weight each	Order Code
300ml	2.14kg	<b>YMT-540</b> <b>-3001K</b>

### KENNEDY Syphon Pump

Flexible plastic outlet and semi-rigid inlet tubes. Hand pumping units incorporate one-way valves. Suitable for use with petrol, diesel and non-corrosive liquids. All tubes can be cut to length.

**SPS/25** For use with containers up to 25ltr. Fitted with 30mm bung.

**Tube length:** inlet 410mm/outlet 530mm.

**SPS/205** For use with containers up to 205ltr. Fitted with a 50mm threaded bung.

**Tube length:** inlet 860mm/outlet 1000mm.


**SPH/205** Heavy duty, for use with containers up to 205ltr. Fitted with a 50mm threaded bung.

**Tube length:** inlet 860mm/outlet 1000mm.



Up to 25ltr

**SPS/25** has a squeeze action.  
**SPS/205 & SPH/205** have a plunger type action.

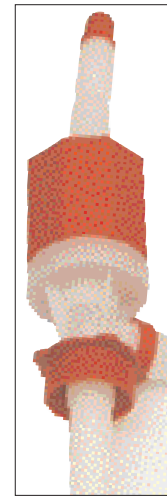

Up to 205ltr  
Heavy duty

Up to 205ltr

Model Number	Suitable for Containers	Weight each	Order Code
SPS/25	25ltr	40g	<b>-4000K</b>
SPS/205	205ltr	80g	<b>-4050K</b>
SPH/205	205ltr	420g	<b>-4150K</b>

### PRESSOL Diesel/Fuel Electrical Pump

The pump is designed exclusively for pumping diesel and fuel oil of the Hazard Class A III in areas that do not carry a risk of explosion. The temperature of the delivered fuel must be between -10°C and +35°C. 230V. Length of suction hose 1.6m, delivery hose 4m.



Not suitable for petrol/gasoline


Flow Rate	Weight each	Order Code
52ltr/min	6kg	<b>PRL-540</b> <b>-3500A</b>

### Rotary Chemical Dispensing Pump

Designed for use with fluids where a regular cast iron or steel barrel pump cannot be used. Pump body is made from glass filled polypropylene with Ryton veins. Seals are from Vitron rubber and all hardware is stainless steel. Strainer fitted at the suction tube inlet stops contaminants. Threaded polypropylene suction tube and a choice of 2" bung adaptors for use on both plastic and metal drums of capacities 50ltr and 205ltr. For use with water-based fluids, anti-freeze, acids, chemicals etc., in addition to all petroleum-based products. Delivery 5ltr per 20 turns of the handle.


**DO NOT USE** with acetone, lacquer, mineral oils, solvents or turpentine.

Discharge per Stroke	Weight each	Order Code
250ml	3kg	<b>KEN-540</b> <b>-3800K</b>

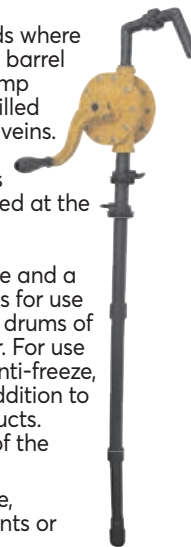

### Double Diaphragm Fuel Transfer Pump

Heavy duty aluminium die-cast construction fuel transfer pump with a discharge rate of up to 1 gallon per 5 strokes. Stainless steel piston and fuel resistant hi-nitrile rubber diaphragm. 2" die cast bung adapter. Pump inlet is fitted with an easy to clean wire mesh screen filter. Telescopic suction tube, adjustable to fit 50 to 205ltr drums, with non-return valve. Easy dispensing through 2.4m (8') of antistatic neoprene rubber hose with die-cast dispensing nozzle.

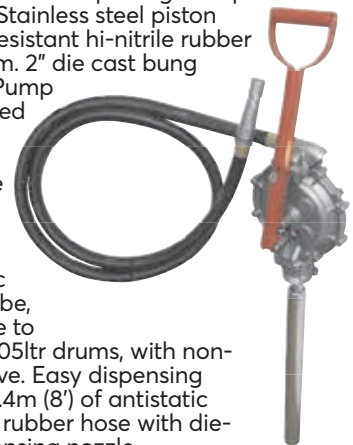

Discharge per Stroke	Weight each	Order Code
800ml	7.5kg	<b>KEN-540</b> <b>-3600K</b>

## Fluid Handling



### Dispensing Bottles

Manufactured from oil and chemical resistant polyethylene. With rigid applicator nozzles and sealing caps.



#### 60ml Concertina Pump Action Bottle

Capacity (ml)	Weight each	Order Code
60	15g	<b>-5000K</b>

#### 250ml Squeeze Bottle

Capacity (ml)	Weight each	Order Code
250	40g	<b>-5020K</b>
500	60g	<b>-5040K</b>

#### With 25° adjustable Brass Spout & Nozzle

Capacity (ml)	Spout Length	Weight each	Order Code
125	90mm	40g	<b>-5100K</b>
250	150mm	55g	<b>-5120K</b>
500	190mm	70g	<b>-5140K</b>

### Heavy Duty Trigger Hand Sprayers

Manufactured from polyethylene, these robust trigger spray dispensers are suitable for many industrial applications. Will dispense various chemicals, water-based detergents, solvents and cleaning agents.




Capacity (ml)	Type	Weight each	Order Code
500	Industrial	79g	<b>-5400K</b>
740	Industrial	85g	<b>-5420K</b>
1000	Industrial	146g	<b>-5440K</b>

### Dual Transfer Pump

#### DTP500


Heavy-duty aluminium construction. Durable inlet and outlet valves. Suitable for the transfer of many different liquid types. Portable and easy to operate. Ideal for use in many home, industrial and farm applications.



Capacity (cc)	Weight each	Order Code
500	878g	<b>-3400K</b>

### Plastic Oil Cans

One-piece moulded plastic bodies with positive force feed pumps, supplied with nylon push-fit spouts.

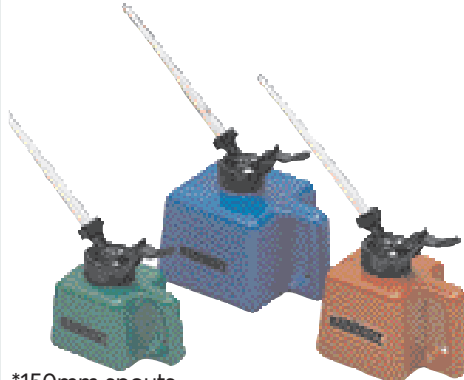

\*150mm spouts

\*\*230mm spouts

Capacity (cc)	Weight each	Order Code
350*	110g	<b>-1880K</b>
500*	120g	<b>-1900K</b>
1000**	170g	<b>-1920K</b>

#### Spare Spouts to Suit (Interchangeable)

Type	Spout Length	Weight each	Order Code
Nylon	230mm	8g	<b>-1950K</b>
Nylon	255mm	17g	<b>-1970K</b>

### Metal Oil Cans

Enamel finish, heavy gauge, seamless metal-bodied oil cans. With positive force feed brass pumps and valves. Supplied with both rigid metal and flexible nylon threaded spouts.



Capacity (cc)	Weight per 10	Order Code
125	2.20kg	<b>-1120K</b>
250	2.90kg	<b>-1250K</b>
350	3.20kg	<b>-1350K</b>
500	3.20kg	<b>-1500K</b>
700	3.67kg	<b>-1750K</b>
1000	4.16kg	<b>-1100K</b>

#### Spare Spouts to Suit (Interchangeable)

Type	Spout Length	Weight each	Order Code
Flexible	150mm	170g	<b>-1800K</b>
	210mm	210g	<b>-1850K</b>

### Oil Suction Gun

#### SG500

Chrome finish. Suitable for rapid draining or filling of oil and other non-corrosive liquids.



**Working pressure:** 90psi/6.2bar.  
**Diameter:** 63mm.  
**Overall length:** 330mm.

Capacity (cc)	Weight each	Order Code
500	870g	<b>-0380K</b>



### Plastic Oil Cans

Moulded plastic body pump oilers with nylon pump unit and 150mm spout.



(Flexible hose not supplied as standard)

Product Number	Capacity (cc)	Weight each	Order Code
350	350	120g	<b>-9022N</b>
500	500	140g	<b>-9024Q</b>

### Metal-Bodied Oil Cans

Fitted spout with nylon pump unit.



Product Number	Capacity (cc)	Weight each	Order Code
3320	350	350g	<b>-9043K</b>
3340	500	370g	<b>-9044L</b>



### Trigger Spray Economy Dispenser

Sprayer head with adjustable and closeable plastic nozzle. For water-based, non-aggressive liquids. Ideal for household use. HDPE (high density polyethylene).

**Colour:** orange.  
**Height:** 280mm.  
**Base dia:** 100mm.



Capacity (ml)	Weight each	Order Code
750	0.11kg	<b>-5200A</b>

### Trigger Spray Industrial Dispenser

Sprayer head with adjustable and closeable plastic nozzle. Suitable for various chemicals. HDPE (high density polyethylene).

**Colour:** orange.  
**Height:** 290mm.  
**Base dia:** 100mm.



Capacity (ml)	Weight each	Order Code
750	0.12kg	<b>-5250B</b>




## Fluid Handling


### Barrel Adaptors

Threaded plastic adaptors to convert drums to use BSP fittings.

**Orange (Trisure) - ADTS**  
Converts from 56 x 4 male to 2" BSP female.



**Grey - ADUSIBC**  
Converts from DIN61 male to 2" BSP female.



**Black - ADDIN2XM**  
Converts from DIN61 male to 2" BSP male.



**Yellow - ADDIN61**  
Converts from DIN61 female to 2" BSP female.



**Blue (Mauser) - ADUSIBC**  
Converts from 70 x 6 male to 2" BSP female.



**Brown - ADDIN71**  
Converts from DIN71 male to 2" BSP female.



Colour	Weight each	Order Code CTL-540
Orange	40g	-2050R
Grey	45g	-2051S
Black	37g	-2052T
Yellow	51g	-2053V
Blue	62g	-2054W
Brown	47g	-2055X

### Rubber 'O' Rings

#### NBR70

Used in engines, gearboxes, shower heads and aircraft, garden hoses and pumps etc., Use as face to face gasket style seals or as shaft seals and allow both rotary and linear movement. Has a 70 Shore hardness and an operating temperature range of -30°C to +120°C. Highly resistant to many chemicals, petroleum, diesel, LPG etc. All sizes to BS1806.



**Seal - ADOR**  
'O' ring for use with all above adaptors.

Weight each	Order Code CTL-540
4g	-2060Z

### Steel Body

#### BT2SV

Lockable. Shut-off valve. Cast iron outlet spout.




Weight each	Order Code CTL-540
2.6Kg	-2022H

### Stainless Steel Body

#### BTSSS

Flame arrestor. Spout rotates through 360°. Teflon seal. Heavy duty. Lockable.

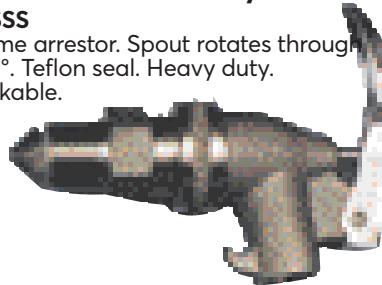

Weight each	Order Code CTL-540
654g	-2012C

### Large Bore Taps

#### 2" BSP Thread

Polyethylene body BTP2. EPT gasket. 2" tapered thread.




Weight each	Order Code CTL-540
255g	-2020F

### Drum Treacle Tap

#### 2" BSP Thread

Cast iron body (BTT2C) with brass faceplate for an excellent seal and easy flow control. Ideal for high viscosity fluids.




Weight each	Order Code CTL-540
1.5kg	-2023J

### Brass Bod

#### 125

Used to allow air to fill the vacuum left by dispensing.

For use in conjunction with 3/4" drum t BSP three Nitrile sec

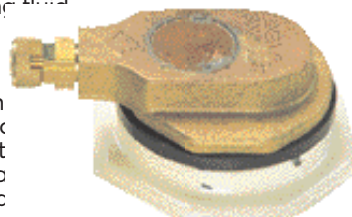

Weight each	Order Code CTL-540
462g	-2024K

### KENNEDY Drum Taps

With 3/4" BSP male threads. Both models can be locked into the off position by use of a padlock or locking pin.

**Polypropylene**  
Not suitable for petroleum based products.




Body	Weight each	Order Code KEN-540
Zinc-Plated	300g	-9000K
Polypropylene	100g	-9050K

### Self-Closing/Safety Tap

#### 3/4" BSP Thread

General-purpose safety taps for fluid dispensing on 210ltr drums. Standard alloy - BTSA. Lockable, nylon seal.

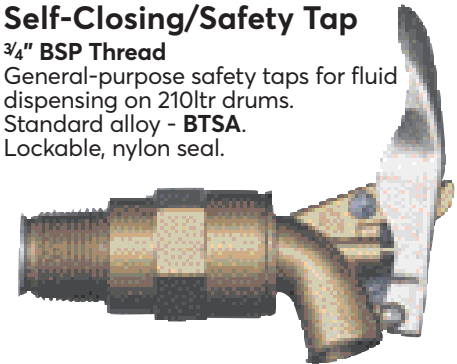


Weight each	Order Code CTL-540
158g	-2010A

### Brass Body

#### BT2BV

Heavy duty. Self-closing.

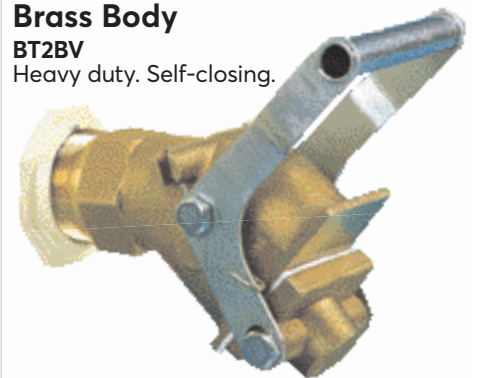

Weight each	Order Code CTL-540
3.0kg	-2021G

### Alloy Flame Resistant

#### BTSAP

Alloy body, lockable, nylon seal with integral flame arrestor.



Weight each	Order Code CTL-540
178g	-2011B

## Fluid Handling



### Tilting Drum Cradle

Tilting Drum Cradle tips, rotates and locates 205ltr drums.

- Equipped with removable handle
- Powder coated finish.
- Large 2½" (63mm) non-sparking wheels making it suitable for use on rough flooring in gas/fuel plants.
- Maximum load 600lbs (273kgs).
- Unit comes flat packed.

**Dimensions (H x W x L):**

415 x 410 x 814mm.

**Weight:** 12.5kg.



Order Code

**KEN-540**

**-4400K**

### Waste Oil Collection

These items are for the collection of waste oil prior to disposal in accordance with your local authority regulations.

#### Oil Drain Collector

This container is made of tough plastic, has an 8ltr capacity and can be closed for storage/transportation for disposal.



#### Oil Drain Pans

This waste oil pan is made of tough plastic and has an 8 or 16ltr capacity.



Type	Size	Shape	Weight each	Order Code
Collector	8ltr	Square	1.13kg	<b>KEN-540</b>
Pan	8ltr	Round	1.14kg	<b>-4500K</b>
Pan	16ltr	Round	5.30kg	<b>-4520K</b>
				<b>-4540K</b>

### Galvanised Drip Trays

Galvanised steel self-colour. Reinforced beaded rim - acts as carrying handle. Available in capacities of 5L and 8L in plain or with mesh cover.




Description	Internal Dimensions Length x Width x Height	Weight each	Order Code
5L Plain Tray	540 x 345 x 50mm	1.6kg	<b>-4210K</b>
5L With Mesh	540 x 345 x 50mm	2.2kg	<b>-4220K</b>
8L Plain Tray	665 x 560 x 50mm	2.7kg	<b>-4250K</b>
8L With Mesh	665 x 560 x 50mm	3.8kg	<b>-4260K</b>



### All-Purpose Drip Tray

For protecting floor surfaces and coverings to prevent any unsightly stains or puddles that would make the storage area floor dirty or slippery. Suitable for catching those small parts during maintenance. If placed under the catch tank while changing oil - any spillage is contained and dirt ratio changes it is ideal for catching bearings, springs etc preventing contamination. The tray is made of moulded plastic with integral carry handles.

**Internal dimensions:** 330 x 520mr



Product Number	Capacity Litre	Weight each	Order Code
350	10	519g	<b>WES-540</b>
			<b>-9200A</b>

### Oil Dispenser

**6GR**

Medium-duty oil dispenser suitable for medium grade oils. Full rotary action pump. Rotationally moulded, medium density polyethylene container complete with nozzle storage drip holster.




Capacity	Height	Order Code
17ltr	700mm	<b>CTL-540</b>
		<b>-2100F</b>

### Drum De-Heading Tools

#### Steel - DDHS

Suitable for removing tops of drums. Replacement blades available.

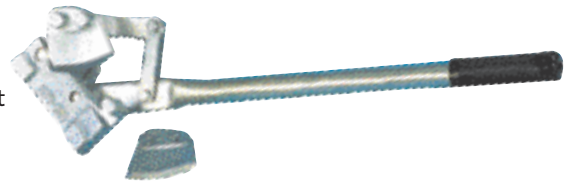

Description	Weight each	Order Code
De-heading Tool	3.33kg	<b>CTL-540</b>
Replacement Blade	246g	<b>-2040P</b>
		<b>-2041Q</b>

#### 90° Handle - Brass - DW2

Non-sparking brass construction. Suitable for 2" and ¾" bungs. Multi-purpose wrench head. Additional 1¼" socket for tightening drum taps.



**Length:** 300mm.

Weight each	Order Code
819g	<b>CTL-540</b>
	<b>-2032N</b>

#### Straight Handle - Steel Plated - DKS45


Suitable for steel or plastic drums. Non-slip rubber grip.



Description	Weight each	Order Code
Straight Handle - Steel	750g	<b>CTL-540</b>
		<b>-2030L</b>

#### Straight Handle - Brass - DKB45

Non-sparking brass construction. Suitable for use with flammable materials. Non-slip rubber grip.

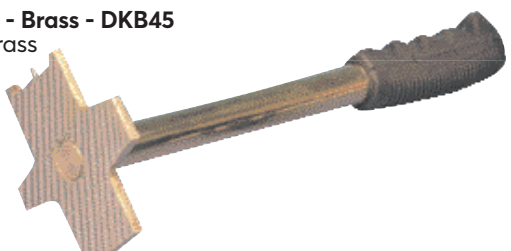

Weight each	Order Code
880g	<b>CTL-540</b>
	<b>-2031M</b>



# Lubrication Equipment



## Pneumatic Fluid Extractor

### FEBK10

Pneumatic fluid extractor for use in draining engine oil, water, fuel and hydraulic fluids from vehicle engines and other mechanical equipment, bleeding brake/clutch fluid and collection of other non-corrosive fluid spillage. High capacity 10ltr fluid reservoir ideal for garage, extension tube storage, used for workshop and on-site use. Supplied with 1500 x 15mm initial tubing with extension tubes; 700 x 6mm, 360 x 10mm, 310 x 6mm and 380mm brake bleeder attachment. Air supply 70-110psi (5-8bar), air consumption 180ltr/min, vacuum (maximum) 500mm HG, extraction rate 2.5ltr/min., air inlet size 1/4" BSP.



Weight each

3.5kg

Order Code  
**KEN-540**

**-4700K**

## Mobile Waste Oil Drainer

### ODB300

This sturdy mobile polyethylene container is for the collection of waste oil draining by gravity from engines/gearboxes. It has a capacity of 30ltr and a float level indicator to let you know when you are nearing its full capacity. The polyamide base is fitted with heavy-duty castors and a handle for easy manoeuvrability. The centre shaft is height adjustable from 900 to 1600mm with a 395mm diameter polypropylene drain pan, the pan is fitted with an anti-splash mesh.



Weight each

11.1kg

Order Code  
**KEN-540**

**-4600K**

## Pneumatic Grease Gun

### Pneumatic PG400

Chrome-plated steel body, enamel finish gun, offset nozzle. Cartridge, bulk or suction fill. For plant and factory maintenance, fleet service etc. Can be connected to air brake systems on lorries. Suitable for medium greases.

**Working pressure:** 3600psi/250bar.

**Diameter:** 56mm.

**Overall length:** 400mm.

Capacity (cc)	Weight each	Order Code <b>KEN-540</b>
400	1.90kg	<b>-0360K</b>



400cc

**PNEUMATIC**

## Pistol Type Adjustable Angle Pneumatic Grease Gun

### PGC400

360° handle rotation. Continuous flow. Chrome plated steel body and enamel finish gun. Offset nozzle. Suitable for medium grease. 14oz cartridge - bulk, suction or pump fill. Can be connected to the air brake systems on lorries. 1200 - 6000psi based on 30 - 150psi feed.



**PNEUMATIC**

Capacity (cc)	Weight each	Order Code <b>KEN-540</b>
400	1.88Kg	<b>-0350K</b>

400cc

## Direct Feed System

### Lever Type LP12.5

Direct high pressure lubricating system with centre pump, metal dust cover/lid with integral stabiliser and fixing mechanism. Flexible delivery tube with offset nozzle. Suitable for medium greases.

**Discharge per stroke:** 3.8cm<sup>3</sup>,

**Tube length:** 375mm,

**Inlet on pump max:** 260mm.

Barrel (illustrated) available separately.



Description	Capacity (kg)	Weight each	Order Code <b>KEN-540</b>
Feed System	12.5	4.90kg	<b>-0540K</b>
Barrel	12.5		<b>-0580K</b>

## High Pressure Grease Dispensing Pump

An easy to operate high pressure manual greasing system that is used to provide volume greasing where power is not available. Used for clean greasing of machinery, equipment and vehicles using grease up to and including NLGI 2. The pump has steel construction with aluminium cast head and solid steel pumping chamber. Complete with drum cover, follower plate, 1220mm (48") flexible grease hose fitted with professional 4-jaw coupler. For use with 12.5kg grease pails. Pump develops 3500psi (240bar) and delivers 1.25gm per stroke (1.2oz per 28 strokes).



Weight each

4.8kg

Order Code  
**KEN-540**

**-3640K**

## Air Operated Grease Pump

Grease set suitable for 15kg drums.

### Equipped with:

1 x Air-operated grease pump ratio 60:1

Mod. 660 12-16kg

1 x Lid for pumps with shank Ø 30 mm

1 x Follower plate for pumps with shank Ø 30mm

1 x Grease control gun with flexible hose and

4-jaws coupling


1 x Grease pump handle

1 x R2 hose 1/4" M-F length 3m

### Specification:

**Weight:** 11,16 kg.

**Volume:** 0,056 m<sup>3</sup>.

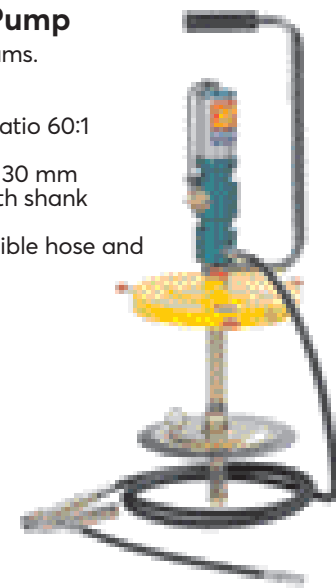

Product Number	Suitable for Containers	Order Code <b>CTL-540</b>
013-1099-000	15kg	<b>-4536H</b>

## Lubrication Equipment



### Grease Guns


#### Lever LG200

Chrome plated steel body, handle and offset nozzle. Suction fill only. Suitable for medium/heavy greases.

**Working pressure:** 3000psi/206bar.

**Diameter:** 45mm.

**Overall length:** 300mm.

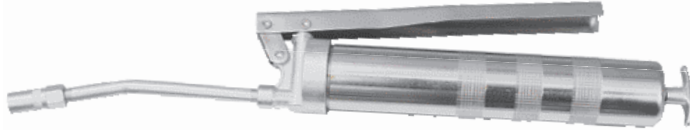

Capacity  
Bulk Fill

200cc

Order Code  
**KEN-540**

**-0150K**

200cc

#### Lever LG500

Chrome-plated steel body and handle, offset nozzle. Cartridge, bulk or suction fill.

Suitable for medium/heavy greases.

**Working pressure:** 4500psi/310bar.

**Diameter:** 63mm.

**Overall length:** 352mm.



Capacity  
Bulk Fill

500cc

Capacity  
Cartridge

450g/16oz

Order Code  
**KEN-540**

**-0300K**

500cc

#### Lever LG400


Chrome-plated steel body, rubber grip and offset nozzle. Cartridge, bulk or suction fill.

Suitable for medium/heavy greases.

**Working pressure:** 4500psi/310bar.

**Diameter:** 56mm.

**Overall length:** 370mm.

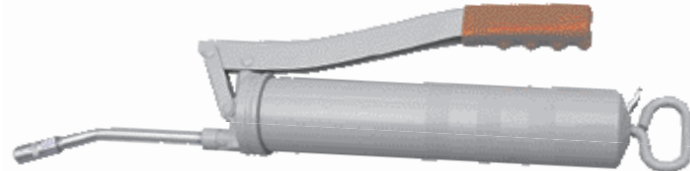

Capacity  
Bulk Fill

400cc

Capacity  
Cartridge

400g/14oz

Order Code  
**KEN-540**

**-0250K**

400cc

#### Lever LG-PRO500

Enamel finish steel body, offset nozzle. Cartridge, bulk or suction fill.

Suitable for medium greases.

**Working pressure:** 6000psi/400bar.

**Diameter:** 56mm.

**Overall length:** 340mm.



Capacity  
Bulk Fill

500cc

Capacity  
Cartridge

400g/14oz

Order Code  
**KEN-540**

**-0340K**

500cc

### YAMOTO Grease Gun - Lever Action

500c/ 14oz Cartridge, bulk or suction fill. Air bleed screw. Comfortable Handle Grip.



Capacity  
Bulk Fill

500cc

Capacity  
Cartridge

400/14oz

Order Code  
**YMT-540**

**-0251K**

500cc

### FUCHS Reiner Grease Gun

A two handed grease gun that is compatible with 500g and 600g cartridges. s 400psi, a higher pressure than many manual guns.



Order Code  
**FCH-740**

**-6936E**

### WANNER Hand Compressor 400CC Cartridge - Body Only

#### 37540

This Swiss range of grease guns are produced for quality and reliability. Abnox Wanner grease guns are designed to operate under more arduous conditions and having a long life means that these grease guns are more economical in the long term.



Capacity  
(cc)

400

Order Code  
**CTL-540**

**-4528A**

500cc

### LUMATIC Oil Gun

#### Side Lever OLGH/CV

Supplied with 150mm steel delivery tube and a hydraulic connector with check valve for high pressure.

**Diameter:** 56mm.

**Overall length:** 365mm.



Capacity  
(cc)

500

Order Code  
**CTL-540**

**-4538G**

500cc

# Lubrication Equipment

## Push-Type Grease Guns

Robust metal body. Versatile one-hand operation. Supplied with universal nozzle connector for standard grease fittings.



Capacity	Weight each	Order Code
35cc	258g	<b>KEN-540</b>
140cc	436g	<b>-0020K</b>
		<b>-0040K</b>

## Professional Grease Gun

### Trigger TG120

Chrome-plated steel body, straight nozzle. Cartridge or suction fill. Suitable for soft/medium greases.

**Working pressure:** 2900psi/200bar.

**Diameter:** 36mm.

**Overall length:** 253mm.



Capacity	Weight each	Order Code
Bulk Fill Cartridge	760g	<b>KEN-540</b>
120cc		<b>-0100K</b>

## Grease Guns

### Trigger TG-PRO500

Enamel finish steel body, straight nozzle. Cartridge, bulk or suction fill. Suitable for medium greases.

**Working pressure:** 3900psi/260bar.

**Diameter:** 56mm.

**Overall length:** 340mm.



Capacity	Weight each	Order Code
Bulk Fill Cartridge	1.35kg	<b>KEN-540</b>
500cc		<b>-0320K</b>

## Cordless Grease Gun

### CPG18V

Featuring LCD battery condition indicator, air bleed and a heavy-duty aluminium pressure head.

**Flow rate:** 100g/min

**Hose length:** 700mm

**Pressure:** 8000psi

**Supply with:** 18V 1.7Ah battery, mains charger and carry case

Suitable for screw type and standard 400g cartridges, manual or bulk filling



Capacity	Order Code
400cc	<b>SLY-540</b>
	<b>-1328F</b>

## YAMOTO Steel Push-Type Grease Gun

120cc

### PTG1200

Bulk or suction fill. Corrosion protective electro-plated finish. Polished nozzle and galvanised plunger assembly. Suitable for medium or heavy greases.



Capacity	Weight each	Order Code
120cc	415g	<b>YMT-540</b>
		<b>-0030K</b>

## Piston-Type Grease Gun

### GGP120

Bulk or suction fill. Corrosion protective electro-plated finish. Galvanised plunger assembly. Suitable for medium or heavy greases.



Capacity	Weight each	Order Code
Bulk Fill Cartridge	505g	<b>YMT-540</b>
120cc		<b>-0370K</b>

## Steel Grease Gun

### GGP400 - Pistol Type Grease Gun

400g (14oz) cartridge, bulk or suction fill. Galvanised trigger body. Galvanised nozzle and plunger assembly. Air bleed button. Comfortable grip. Suitable for medium or heavy greases.



Capacity	Weight each	Order Code
Bulk Fill Cartridge	1.50kg	<b>YMT-540</b>
400cc		<b>-0360K</b>

## LUMATIC Grease Gun

60cc

### TelescopicMPO

Telescopic hand grease gun with metal body and push-on connector.



Capacity	Weight each	Order Code
60cc	100kg	<b>CTL-540</b>
		<b>-4536N</b>



# Grease Nipples



## Hydraulic Grease Nipple Kit

### Contents

**Straight:**  
 $\frac{1}{4}$ " BSP,  
 $\frac{1}{8}$ " BSP,  
M8 x 1.25  
 $\frac{1}{4}$ " BSF.

**45°:**  
M8 x 1.25  
M10 x 1.50.

**90°:**  
 $\frac{1}{4}$ " BSF.

**140**  
**PIECES**

Order Code  
**KEN-541**  
**-5140K**



## Hydraulic Grease Nipples

For use with Kennedy grease guns and all other hydraulic grease equipment.

### Straight Hook-On



Thread Size	Weight Per 100	Order Code KEN-541
$\frac{1}{8}$ " BSP(T)	1.30kg	<b>-1070K</b>
$\frac{1}{4}$ " BSP(T)	2.00kg	<b>-1090K</b>

### 45° Type



Thread Size	Weight Per 100	Order Code KEN-541
$\frac{1}{8}$ " BSP(T)	1.30kg	<b>-0610K</b>
$\frac{1}{4}$ " BSP(T)	1.95kg	<b>-0690K</b>
$\frac{1}{4}$ " BSF	0.70kg	<b>-0770K</b>
M6 x 1	0.70kg	<b>-0850K</b>
M8 x 1.25	0.60kg	<b>-0930K</b>
M10 x 1.5	1.25kg	<b>-1010K</b>

## Hydraulic Connectors

Securely grips the grease nipple while in use.

### 4-Jaw



Thread Size	Weight each	Order Code KEN-541
$\frac{1}{8}$ " BSP(T)	40g	<b>-0480K</b>

### Straight-Type




Thread Size	Weight Per 100	Order Code KEN-541
$\frac{1}{8}$ " BSP(T)	0.60kg	<b>-0600K</b>
$\frac{1}{4}$ " BSP(T)	1.10kg	<b>-0680K</b>
$\frac{1}{4}$ " BSF	0.30kg	<b>-0760K</b>
M6 x 1	0.30kg	<b>-0840K</b>
M8 x 1.25	0.50kg	<b>-0920K</b>
M10 x 1.5	0.60kg	<b>-1000K</b>

### 90° Type



Thread Size	Weight Per 100	Order Code KEN-541
$\frac{1}{8}$ " BSP(T)	1.30kg	<b>-0630K</b>
$\frac{1}{4}$ " BSP(T)	2.10kg	<b>-0710K</b>
$\frac{1}{4}$ " BSF	0.70kg	<b>-0790K</b>
M6 x 1	0.60kg	<b>-0870K</b>
M8 x 1.25	0.55kg	<b>-0950K</b>
M10 x 1.5	1.30kg	<b>-1030K</b>

### Hook-On

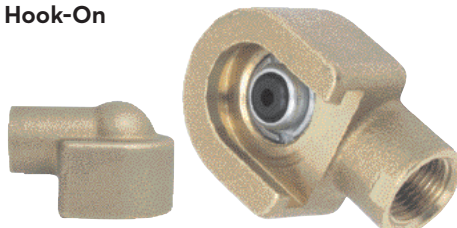

Thread Size	Weight each	Order Code KEN-541
$\frac{1}{8}$ " BSP(T)	40g	<b>-0490K</b>

## Rubber & Nylon Hoses

Suitable for high pressure use with  $\frac{1}{8}$ " BSP end fittings. Rigid tubes are solid steel for use with all grease guns.



Product Number	Size & Type	Weight each	Order Code CTL-540
RF12	12" Rubber	95g	<b>-4612N</b>
RF12/N	12" Nylon	45g	<b>-4613P</b>
RF9	9" H/P Rubber	80g	<b>-4616S</b>
SRT10	10" Rigid	75g	<b>-4621Y</b>
SRT6	6" Rigid	40g	<b>-4622Z</b>



## Hydraulic Connectors

### Giant Hook-On Type



Product Number	Weight each	Order Code CTL-541
GHOC1	160g	<b>-4603D</b>

### Push-on Type



Product Number	Weight each	Order Code CTL-541
POC1	10g	<b>-4610L</b>

### Hydraulic Heavy Duty



Product Number	Weight each	Order Code CTL-541
HC1	35g	<b>-4604E</b>

### Hydraulic Standard Duty



Product Number	Weight each	Order Code CTL-541
HC5	45g	<b>-4605F</b>

### Conical-Type



Product Number	Weight each	Order Code CTL-541
CC1	10g	<b>-4602C</b>

### Lub-Type For Concave Nipples



Product Number	Weight each	Order Code CTL-541
LC1	15g	<b>-4609K</b>

### Slide-on Type With Knuckle Joint



Product Number	Weight each	Order Code CTL-541
SOC2	120g	<b>-4619S</b>

## Metal & Flexible Hoses

For use with Kennedy grease guns, flexible hoses improve access in confined spaces,  $\frac{1}{8}$ " BSP connecting threads.



Bore x Length	Type	Weight each	Order Code KEN-540
150mm	Offset Metal	40g	<b>-0390K</b>
8x230	Nylon	30g	<b>-0400K</b>
8x300	Nylon	40g	<b>-0410K</b>
8x500	Nylon	40g	<b>-0420K</b>
11x230	Rubber	60g	<b>-0430K</b>
11x300	Rubber	70g	<b>-0440K</b>
11x500	Rubber	90g	<b>-0450K</b>